

# PW3PM4X36

- Outdoor Pole Projector Light
- Lamp :
- Die Cast Aluminium Housing With Heatsink within
- Optical Grade PMMA Lens Used
- Pre - Treated Powder Coating for Corrosion Resistance
- Clear Toughened Glass Used
- Silicone Rubber Gasket Used For Water Resistance
- SS304 Grade External & Internal Fasteners used for corrosion resistance
- Built - In IP68 Potted Control Gear Used
- High Power Leds Used for long life & good Thermal management
- Swivel Joint for 350° Rotational + 180° Tintable
- With Pole Holder with Lamp For easy installation on Pole
- Protection : IP65
- Mounting : On Pole Through Pole Holder Bracket with Bolts

-Pole:

Pole made of Mild Steel

High strength and resistance in various atmospheric conditions

All the joints in the body of the pole are welded by using the v groove technique

Pole used for integration of various LED modules

The coating process makes the pole excellent corrosion resistant.

Mounting : On Base Plate & J Anchor Bolt In Foundation



## DIMENSIONS


**Lamp :**

36W - Ø100X198mm

**Pole :**

ø80X3200mm

|                   |  |
|-------------------|--|
| Material          | Aluminum                               |
| Finish            | Jet Black, Dark Green , Antracite Grey |
| Lamp              | LED                                    |
| Size              | Ø100X145mm                             |
| Input Power       | 36W                                    |
| Color Temperature | 4000K                                  |
| Lumen             | (34° - 3240 LM)                        |
| Efficacy          | (34° - 90 LM/W)                        |
| Beam Angle        | 34°                                    |
| Input Voltage     | 220-240VAC                             |
| Driving System    | Constant Current                       |
| Dimming Type      | ON / OFF                               |
| CRI               | 80+                                    |
| MacAdam           | <3                                     |

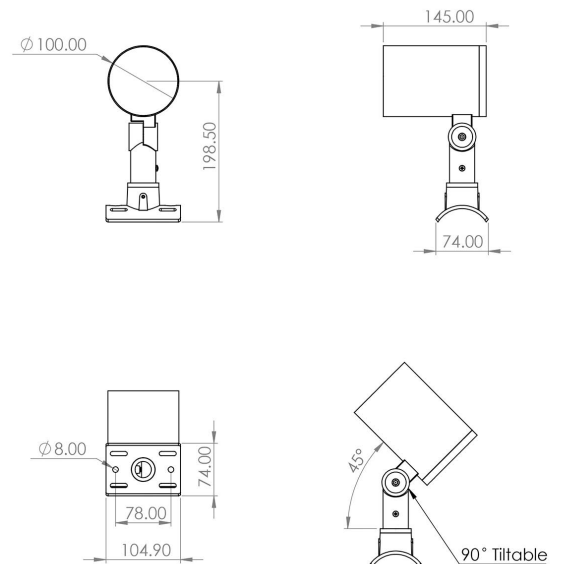

|                       |   |
|-----------------------|---|
| Operating Temperature | -10 to 50°C   |
| LED Life              | L70 at 50000 burning Hours                                |
| Safety Class          | Class I   |
| System Warranty       | 2 Years   |
| IP Rating             | IP65  |
| Swivel                | Swivel Joint For Directional Lighting                     |
| Rotation & Tilt       | Lamp : 350° Rotational + 180° Tilttable                   |
| Lens                  | Optical grade PMMA Lens                                   |
| Glass                 | Clear Toughened Glass                                     |
| Fasteners             | SS 304 grade Internal & External fasteners                |
| Cable                 | High current carrying 3 core cable                        |
| Cable Entry           | Single Cable Entry  |
| Power Supply          | Built - IN IP68 potted constant Current power supply unit |
| Weight                | Lamp: 4X2.1Kg<br>Pole : 19.1Kg                            |

